

MONUMENT RECORD

Corner ID: **Wash_E05**

Section Corner



Sections 5,6,7 & 8- T10N-R01W, 2nd P.M.
Washington Township, Monroe County, Indiana

Section 06 T10N-R01W	Section 05 T10N-R01W
Section 07 T10N-R01W	Section 08 T10N-R01W

MONUMENT: Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)

(#10221) Faint cross on top of 0.33' north-south by 0.33' east west (on top) or 0.4' north-south by 0.4' east-west at ground level, Limestone found with top 1.5' above ground, 1' East of the center of an old but solid wood post at the beginning of an old south bound fence line. A 1.2' north-south by 2.1' east-west by 0.2' thick Limestone was observed lying flat on the ground 1.2' north of the stone.

MONUMENT LOCATION SKETCH:

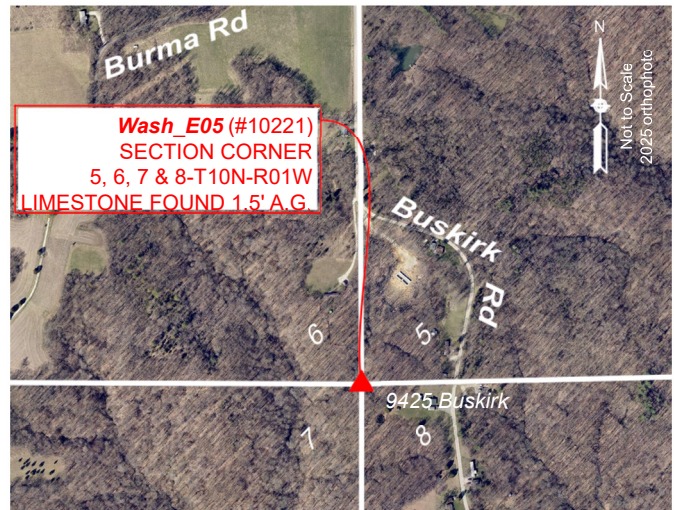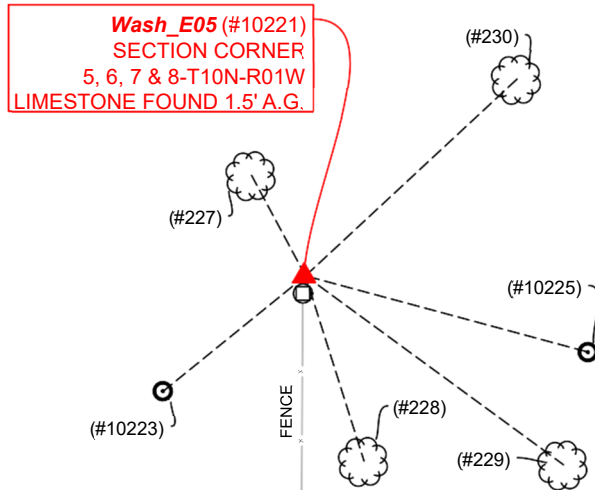

WITNESS MONUMENT TIES: Describe at least three new BT's (Bearing Trees) and/or witness objects established or work done to preserve existing evidence. BT diameters are noted as dbh (diameter at breast height) and are measured approximately 4.5' above ground. Bearings and Distances are measured from the monument to the center of the BT. Bearings and Distances to witness ties were measured with a Sokkia Set 510 Total Station.

ID	Bearing	Distance	Description
(#227)	N28° 11'W	11.9'	16" diameter White Oak tree at crest of steep hill.
(#228)	S17° 29'E	20.3'	11" diameter White Oak tree.
(#229)	S53° 42'E	33.4'	10" diameter Pignut Hickory tree.
(#230)	N47° 00'E	30.1'	15" diameter Sugar Maple tree.

MONUMENT ACCESSORIES

Other survey grade monuments that were located in the vicinity and their relation to the monument. Witnesses noted as a Rebar Lite are a 5/8" diameter by 16" polycarbonate rod with a 1-1/2" mag nail in top and yellow plastic cap stamped "MONROE COUNTY WITNESS POINT" set 0.1 foot below grade unless otherwise noted.

Geodetic coordinates in this table are provided in the format Northing, Easting

(#10225)	S74° 51' 06"E	30.52'	N:1484959.8121' E: 3102072.8445' Rebar Lite
(#10223)	S50° 52' 32"W	19.12'	N:1484955.7259' E:3102028.5525' Rebar Lite



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 1 of 4

MONUMENT RECORD

Corner ID: **Wash_E05**

Section Corner

Sections 5,6,7 & 8- T10N-R01W, 2nd P.M.
Washington Township, Monroe County, Indiana

Section 06 T10N-R01W	Section 05 T10N-R01W
Section 07 T10N-R01W	Section 08 T10N-R01W

PHOTO IDENTIFIED: Photo Date: 07/03/2025



Photo Orientation & Description: From Above



Photo Orientation & Description: From Southeast Looking Northwest

EXISTING SURVEY HISTORY Include as much detail and history of the corner as known at the time of perpetuation

ORIGINAL GOVERNMENT SURVEY:

Year Surveyed: 1819 By: Thos Brown Deputy Surveyor. Where filed or recorded: MONROE County Original notes page 139.

Original monument: Post

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Beech	5"	S56°W	18 links
Beech	6"	S87E°	16 links

Notes:

SUBSEQUENT CORNER RESTORATION:

Date Surveyed: March 20, 1871 By: Alexander Spencer, Monroe County Surveyor.

Where filed or recorded: Legal Survey Book 2, page 172.

Original monument: Not noted

Bearing Trees or Reference Monuments:

Species	Dia.	Bearing	Distance
Beech	5"	S56°W	18 links
Beech	6"	S87°E	16 links

Notes: Same reference trees noted in 1819.

SUBSEQUENT CORNER RESTORATION:

None Found in Legal Survey Books.

OTHER SURVEY HISTORY: Include details such as surveyor name, date, recording info, monument description, etc.

DocumentDate	SurveyID	Surveyor	Description	InstrumentNo
	RSID04035	Farkas, Edmund O.	Donald A. & Ruth A. Wood	219355
	RSID004046	Farkas, Edmund O.	278.99 acre survey	
3/30/1871	RSID004043	Spencer, Alexander	Legal Survey Book 2, Page 175	
7/8/1987	RSID005782	Vollmer, Robert C.	Department of Natural Resources, Morgan-Monroe State Forest Survey	
2/20/2004	RSID005157	Archer, Steven W.	For Susan Graves containing 1.78 acres	
5/28/2009	RSID004049	Smith, Stephen L.	Blackwell Boundary survey	
6/3/2009	RSID001297	Vollmer, Robert C.	Access survey from the Burma Rosd near the Buskirk Junction for Forestry Operations.	



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 2 of 4

MONUMENT RECORD

Corner ID: **Wash_E05**

Section Corner

Sections 5,6,7 & 8- T10N-R01W, 2nd P.M.
Washington Township, Monroe County, Indiana

Section 06 T10N-R01W	Section 05 T10N-R01W
Section 07 T10N-R01W	Section 08 T10N-R01W

12/6/2022	RSID005117	Borgman, Todd M.	"Schaible Type ""E"" Administrative Subdivision Final Plat"	2023004221.IN
11/22/2023	RSID005345	Pardue, Scott P.	"Boundary Survey 9495 N Buskirk Rd"	2024000268.IN

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 04/10/1997 *By:* Kevin Enright & Alan McClain *Monument Found:* Stone *BTs or Reference Objects Found:* References established. *Project #* Wash E05 *Field Book:* 97-02 (27) page 10. *Notes:* 1997 tie sheet notes Stone "0.34' out of ground" however field notes note height 1.35'.

ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND BY THE MONROE COUNTY SURVEYORS OFFICE: *Include, search area or areas, search procedure, etc.*

Date of Field work/Search: 07/03/2025 *By:* MES/JMG *Monument Found:* Stone. *BTs or Reference Objects Found:* From prior MCSO project yes. *Project #:* 25-003. *Field Book:* 58 pages 63 & 64 *Notes:*

OTHER EVIDENCE: *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

Stone is 1' East of a wood corner post and appears to line up with the extension of the edge of the woods to the East, at the Southwest corner of the property at 9425 North Buskirk Road Gosport In. The Stone is an easy walk from the House at said address.

MONUMENT PRESERVATION: *Describe work done to preserve existing monument.*

GPS coordinates were established on the Stone. 2 rebar lites were set within sight of it, that could be used to reestablish its location, should it become obliterated. We also located trees, for visual reference. A steel post with Monroe County Survey marker sign, facing East, was observed on the post 1' west of the Stone.

THEORY OF LOCATION: *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*

The stone was found and is believed to be the monument, or at the location of the monument set by Alexander Spencer, Monroe County Surveyor, in legal survey book 2, page 172. Mr. Spencer did not record the characteristics of the monument he set, or his method of establishment for setting it, but I presume with him being within 52 years of when the original post was set, that he had references to work from and he cites the same reference trees as cited in 1819 but of the same diameter as cited in 1819, which seems unlikely. Seeing no other evidence of the original, the Stone is in my opinion the most reliable evidence of the original location of the corner with negligible uncertainty.

GEODETIC COORDINATES: *Northing:*1484967.8' *Easting:*3102043.044'

BASIS OF GEODETIC COORDINATES:

The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83_NO_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover and/or with a Sokkia Set 510 Total Station radially from points located with GPS. Distances obtained with GPS have not been adjusted to ground. To adjust grid distances to ground distances multiply them by a scale factor of 1.000041933.

This document is not complete without the associated Corner Perpetuation plat and report of survey for Section 6 or 7 Township 10 North Range 1 West by Michael E. Sheppard of the Monroe County Surveyor's Office.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyorsoffice@co.monroe.in.us

Page 3 of 4

MONUMENT RECORD

Corner ID: **Wash_E05**

Section Corner

Sections 5,6,7 & 8- T10N-R01W, 2nd P.M.
Washington Township, Monroe County, Indiana

Section 06 T10N-R01W	Section 05 T10N-R01W
Section 07 T10N-R01W	Section 08 T10N-R01W

CERTIFICATIONS:



Michael E. Sheppard

Date: 1/20/2026

Michael E. Sheppard

State of Indiana

Professional Surveyor

No. 20100021



Trohn Enright-Randolph

Date: 1/20/2026

Trohn Enright-Randolph

Monroe County Surveyor



Donna K. Smith

Accepted by the Monroe County
Surveyor Review Board on

1/20/2026



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

501 N Morton Street Ste 205, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us


Page 4 of 4

MONUMENT RECORD

STATE OF INDIANA ~ COUNTY OF MONROE

Section 6, Township 10 North, Range 1 West,

Monument Description & Remarks: Limestone solid in ground with tiny "x"
stone- 0.33' x 0.33' x 1.10' out of ground

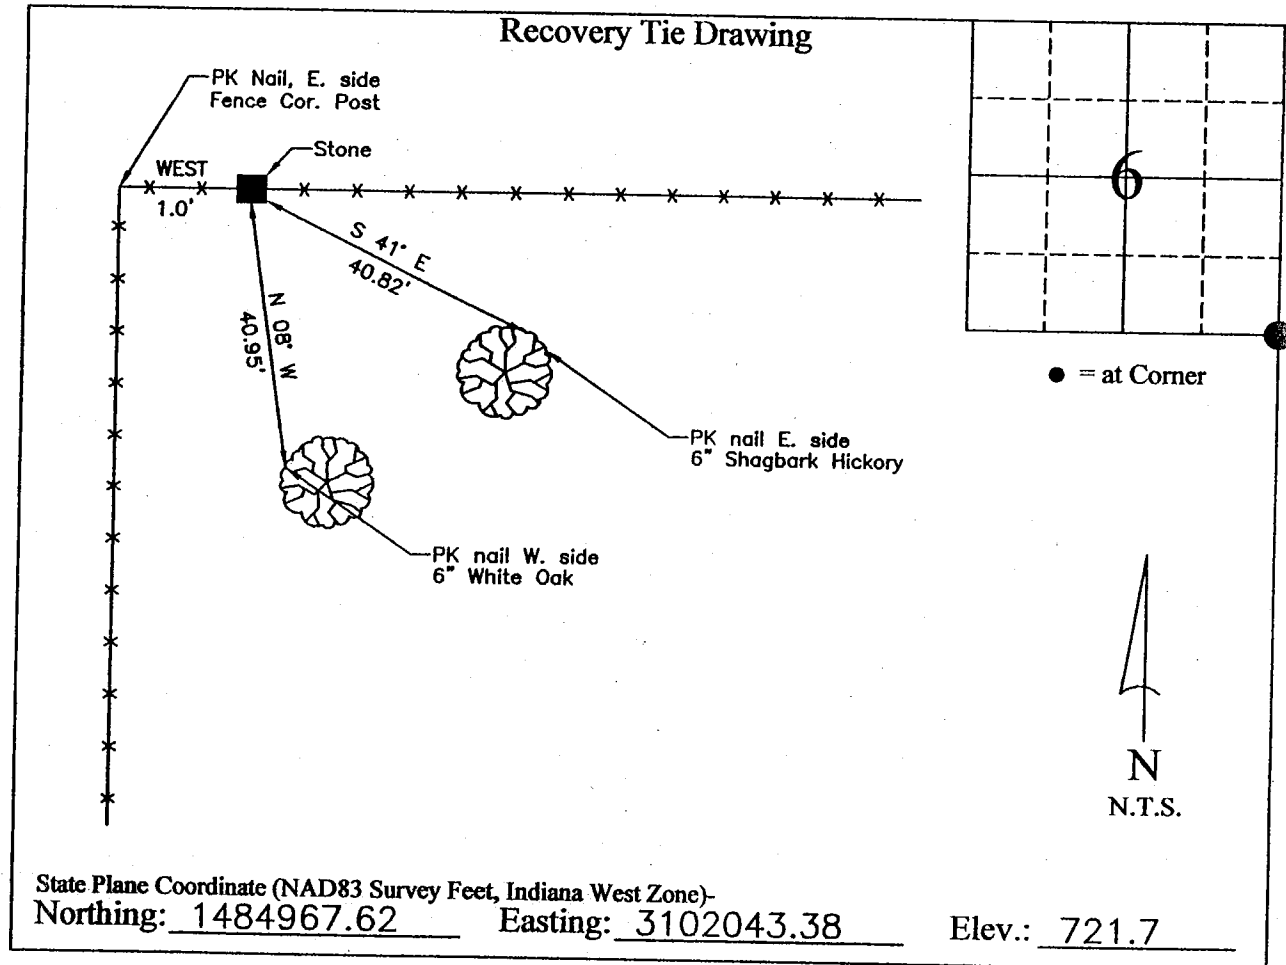

I, Ben E. Bledsoe, Registered Land Surveyor, here by certify that this document was prepared under my direction in accordance with the provisions of Section 17-3-64-4 through 17-3-64-8 of the Indiana Code, being Acts of 1965, Chapter 319; this 6th day of January, 2005 A.D.

Ben E. Bledsoe

Indiana Registered Land Surveyor No. S0559



MONUMENT RECORD

State of Indiana - County of Monroe

Section: 06

Township: 10 North

Range: 1 West


Corner ID: Wash E-05

Monument Description & Remarks: Found County Limestone w/"+" at SE corner of section. Limestone measured 1.35' x 0.34' x 0.34' out of ground.

RECOVERY TIE DRAWING

Field Book 97-02 Page No. 10

USGS Modesto Quad

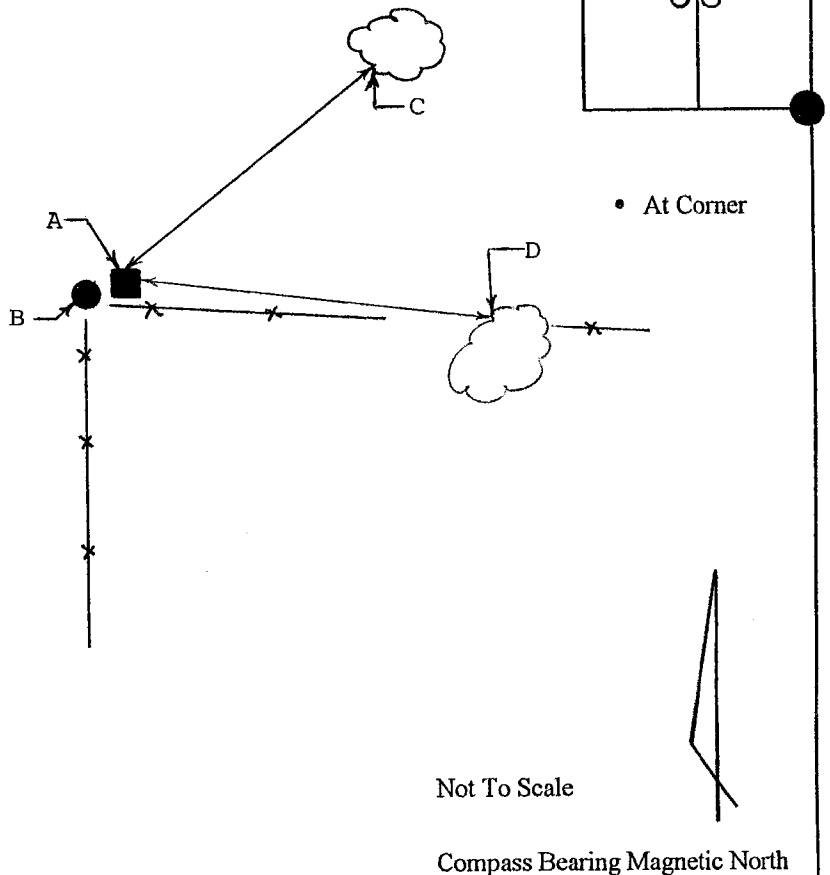

A - Limestone w/"+"

B - South 86 degrees West, 0.9' from stone
PK nail in fence corner post
Survey marker sign set 3.4' up

C - North 49 degrees East, 29.41' from stone
PK nail in 10" Sugar Maple

D - South 86 degrees East, 32.34' slope distance
PK nail in 36" Oak

Not To Scale

Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of Section 36, Article 10 of the Indiana Code; and the above data is given under my hand and seal this 10th day of April, 1997.

Kevin Enright

SEAL

Administered by

Surveyor

SEAL

Review Board

Indiana R.L.S. No.

N/a

MONUMENT RECORD



STATE OF INDIANA - COUNTY OF MONROE

SECTION 6, TOWNSHIP 10 N, RANGE 1 W

MONUMENT DESCRIPTION & REMARKS

LIMESTONE SOLID IN GROUND WITH TINY "X".STONE= 0.33'x 0.33'x 1.10' OUT OF GROUND

RECOVERY TIE DRAWING

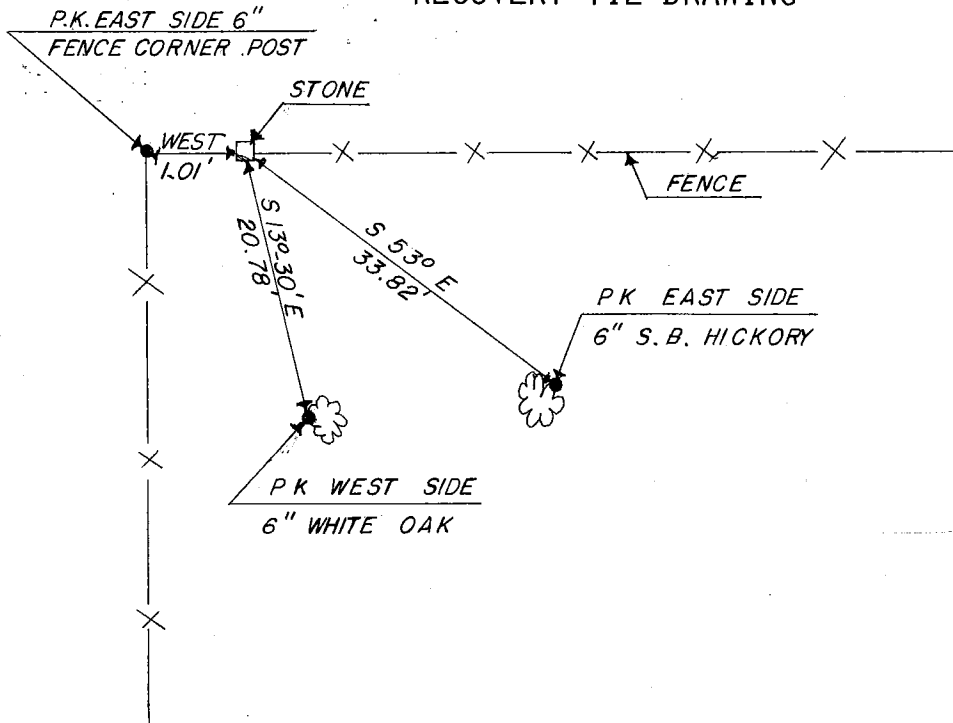

(•) AT CORNER



NOT TO SCALE

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL THIS 16 TH DAY OF DECEMBER, 19 90 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. _____

OR _____

UNITED STATES GOVERNMENT AGENCY

TOWNSHIP:
WASHINGTON

CORNER I.D.

TITLE _____

E-5